

# Linkade

Chainlink system.

## Construction

Steel posts are used, clad using chainlink.  
Available up to 2.00m high (2.50m overall) as standard.

Other heights on application.

**Type LB** Lightweight, no top rail.

**Type LB/P** Lightweight, no top rail, extended for barbed wires.

**Type ZB** Medium weight, with top rail.

**Type RB** Medium weight, with top rail and extension for 2 or 3 barbed wires.

**Type VB** Heavy-Medium weight, with top rail and V-extension for 6 barbed wires.

**Type ZI** Heavy weight post, with top rail and extension for 2 or 3 barbed wires.

## Standard heights

Mesh 100 - 125 (150) - 150 (200) - 180 (200) - 200 (250)cm. In brackets overall height incl. barbed wires.

## Materials

Posts  $\varnothing 41.5 \times 2\text{mm}$  CHS Type LB 100cm < 180cm

Posts  $\varnothing 60.3 \times 1.75\text{mm}$  CHS Types ZB - RB - VB.

Posts INP 8 Type Z.


Posts set at 3.00m centres as standard 700mm deep.

Rail  $\varnothing 41.5 \times 2.00\text{mm}$  CHS

Chainlink - 50mm mesh x 3.00mm galvanised core, wire plastic coated. Option 3.70mm wire.

## Surface Treatment

- Galvanised as standard:
- Option; additionally powder coated in standard colour Green:

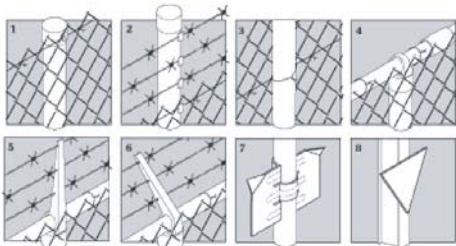

**Citadel**

Unit F1, Halesfield 4,  
Telford, Shropshire TF7 4AP, England  
Tel: +44 (0) 1952 410 020  
Fax: +44 (0) 1952 411 144  
E-mail: mail@citadelsecurityuk.com  
www.citadelsecurityuk.com