

Linkade

Chainlink system.

Construction

Steel posts are used, clad using chainlink.
Available up to 2.00m high (2.50m overall) as standard.

Other heights on application.

Type LB Lightweight, no top rail.

Type LB/P Lightweight, no top rail, extended for barbed wires.

Type ZB Medium weight, with top rail.

Type RB Medium weight, with top rail and extension for 2 or 3 barbed wires.

Type VB Heavy-Medium weight, with top rail and V-extension for 6 barbed wires.

Type ZI Heavy weight post, with top rail and extension for 2 or 3 barbed wires.

Standard heights

Mesh 100 - 125 (150) - 150 (200) - 180 (200) - 200 (250)cm. In brackets overall height incl. barbed wires.

Materials

Posts $\varnothing 41.5 \times 2\text{mm}$ CHS Type LB 100cm < 180cm

Posts $\varnothing 60.3 \times 1.75\text{mm}$ CHS Types ZB - RB - VB.

Posts INP 8 Type Z.


Posts set at 3.00m centres as standard 700mm deep.

Rail $\varnothing 41.5 \times 2.00\text{mm}$ CHS

Chainlink - 50mm mesh x 3.00mm galvanised core, wire plastic coated. Option 3.70mm wire.

Surface Treatment

- Galvanised as standard:
- Option; additionally powder coated in standard colour Green:

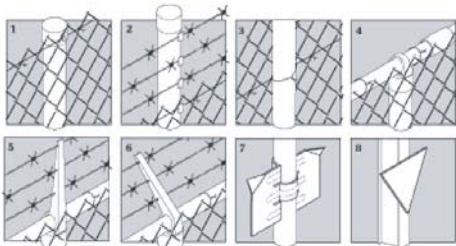

Citadel

Unit F1, Halesfield 4,
Telford, Shropshire TF7 4AP, England
Tel: +44 (0) 1952 410 020
Fax: +44 (0) 1952 411 144
E-mail: mail@citadelsecurityuk.com
www.citadelsecurityuk.com